

Generac® Portable Generator & Transfer Switch Kit

17,500 Watts



GENERAC
OHVI® ENGINES
OVERHEAD VALVE INDUSTRIAL




17,500 Watts Portable Generator

Generac Model	17500
Model Number	05308
Rated Watts	17500
Surge Watts	26250
Voltage (Vac)	120/240
Output	145.8/72.9
Engine Type	Generac OHVI®
Engine Displacement	992cc
Engine Starting	Electric
Fuel Type	Gasoline
Fuel Capacity (gal.)	16
Outlets	2 x 120V 20A GFI, 2 x 120V 20A 2 x 120V 30A, Twistlock 1 x 120/240V 30A, Twistlock 1 x 240V 50A, 1 x 12Vdc 10A
Full Pressure Lubrication	✓
Single Point Lifting	✓
Spin-on Oil Filter	✓
Automatic Idle Control	✓
Low Oil Pressure Shutdown	✓
Solid State Voltage Regulator	✓
GFI Protection	✓
Anti-Vibration System	✓
Circuit Breakers	✓
Battery Charge Cables	✓
Maintenance Free Battery	✓
Full 1-1/4" Tubular Frame	✓
Pneumatic Wheel Kit	✓
Electronic Governor	✓

FEATURES

- OHVI® Engine — Most Powerful, longest lasting engine available!
- Enough power to start a 5-ton A/C unit
- Full pressure lubrication
- Automotive style spin-on oil filter
- Extended engine life — Rated 3,000+ hours
- Large 16 gallon gasoline fuel capacity for extended operation
- Improved fuel economy
- Lower operating temperatures
- EPA/CARB Certified
- Battery/wheel kit/electric start (standard)
- 2 Year limited warranty
- 17,500 running watts / 26,250 surge watts

TRANSFER SWITCH KIT (included)

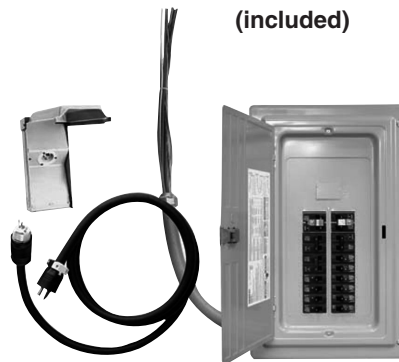

Kit includes: 50 amp manual transfer switch with up to 16 selected, pre-wired circuits, 15' power cord and outdoor connection box.

A single switch will lock out the utility and transfer the load to the generator.

Dimensions with handle & wheel kit installed:

38.5"H x 30.75"W x 48.5"L

Dimensions without handle & wheel kit:

33.5"H x 21.5"W x 37.5"L

Dimensions in shipping carton: 36"H x 24"W x 49"L

GENERAC®

POWER SYSTEMS, INC.

GENERAC® POWER SYSTEMS, INC. • P.O. BOX 8 • WAUKESHA, WI 53187

262/544-4811 • FAX 262/544-4851